


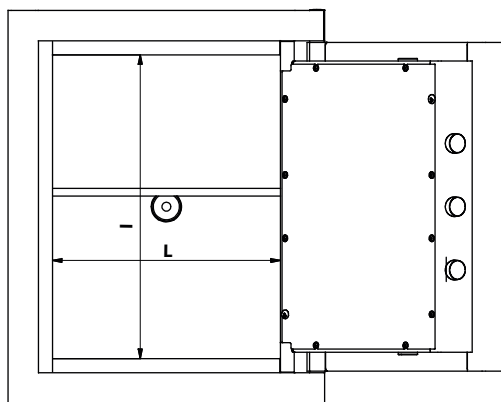
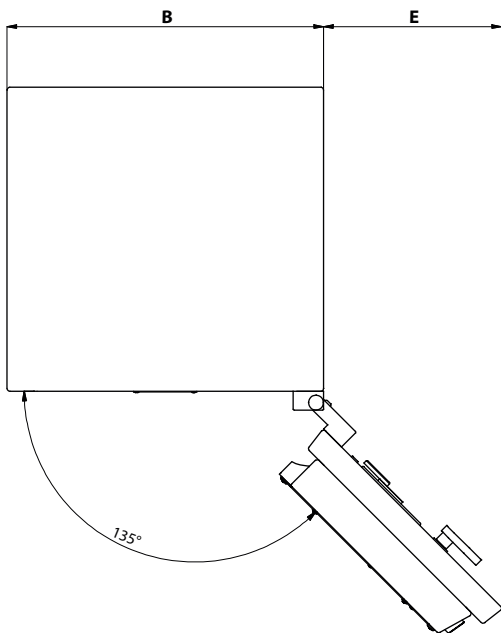
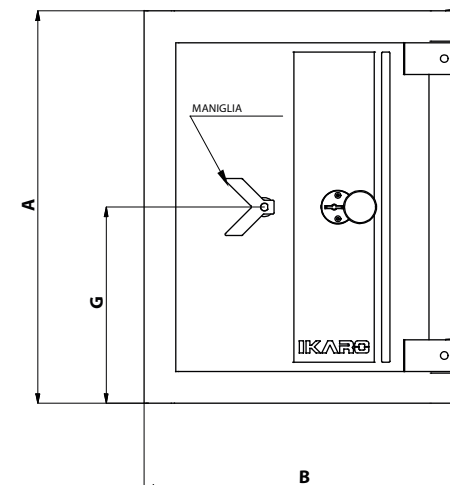
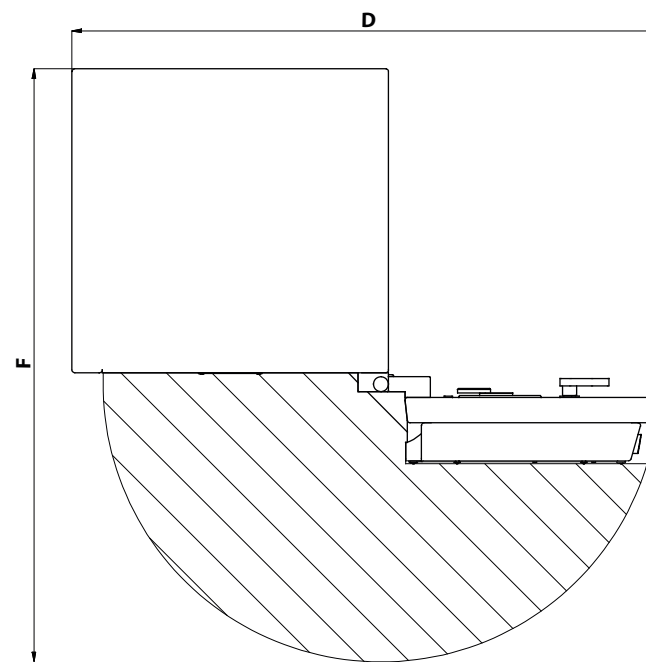


APERTURA MINIMA
PER ACCESSO COMPLETO

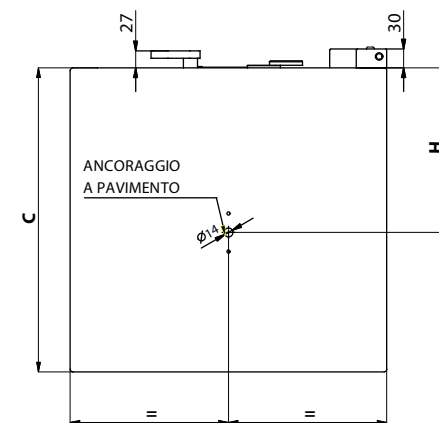

ANCORAGGIO A
PARETE POSTERIORE

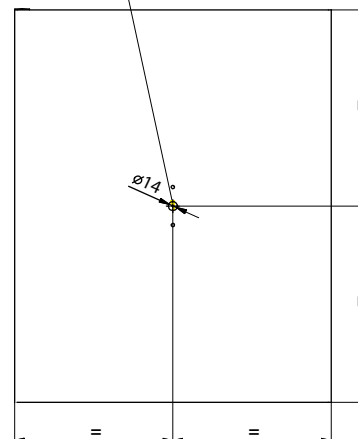

*Misure Fornite in mm

Modello	A (Altezza)	B (Largh.)	C (Prof.)	D (Largh. tot.)	E (Sporg.)	F (Prof. tot.)	G (Altezza Maniglia)	H (Pos. Ancoraggio)	I (Altezza utile)	L (Largh. utile)	M (Prof. utile)
IKARO 45	450	500	480	926	282	937	225	260	360	410	330
IKARO 62	620	500	480	926	282	937	310	260	530	410	330
IKARO 85	850	600	550	1126	352	1107	425	295	760	510	400
IKARO 110	1100	600	550	1126	352	1107	550	295	1010	510	400
IKARO 145	1450	600	550	1126	352	1107	725	295	1360	510	400

IKARO